



WINDOW OPENER



A photograph of a modern building facade with large windows and a blue overlay. The building has a grid-like pattern of light-colored panels. The windows are dark-framed and reflect the sky and surrounding buildings. A semi-transparent blue horizontal band is overlaid on the upper part of the image, containing the text.

CAT36

Rod Type Linear Motor




16045-DC001



16010.00.009

SIZE

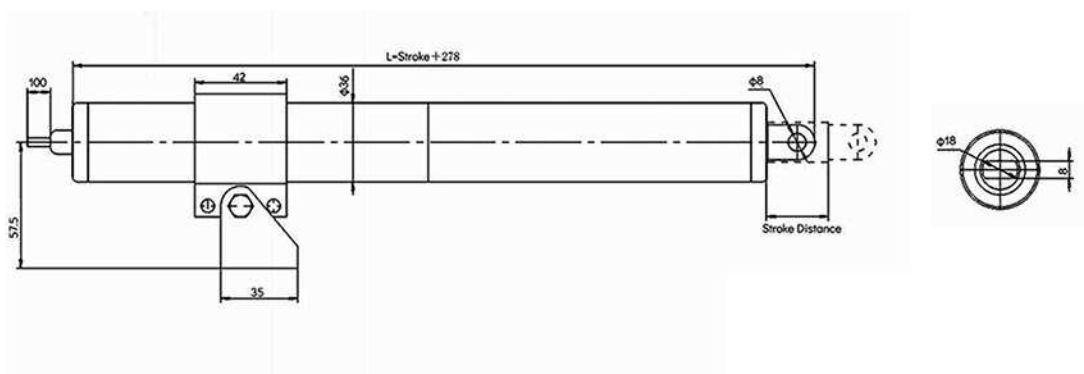

DATA PARAMETERS

Item	Stroke	Voltage	Current	Force	Speed	Protection	Length
CAT 36-1000/300	300	24/220V	1.3A	1000N	8mm/s	IP64	593mm
CAT 36-1000/400	400	24/220V	1.3A	1000N	8mm/s	IP64	693mm
CAT 36-1000/500	500	24/220V	1.3A	1000N	8mm/s	IP64	793mm
CAT 36-1000/600	600	24/220V	1.3A	1000N	8mm/s	IP64	893mm
CAT 36-1000/700	700	24/220V	1.3A	1000N	8mm/s	IP64	993mm
CAT 36-1000/800	800	24/220V	1.3A	1000N	8mm/s	IP64	1093mm
CAT 36-1000/900	900	24/220V	1.3A	1000N	8mm/s	IP64	1193mm
CAT 36-1000/1000	1000	24/220V	1.3A	1000N	8mm/s	IP64	1293mm

* S: Standard, including 16045-DC001 and 16010.00.009 ; R: Built-in receiver, including 16010.00.009.

CAT50

Chain Type Window Motor







16045-DC001



16010.00.009

SIZE

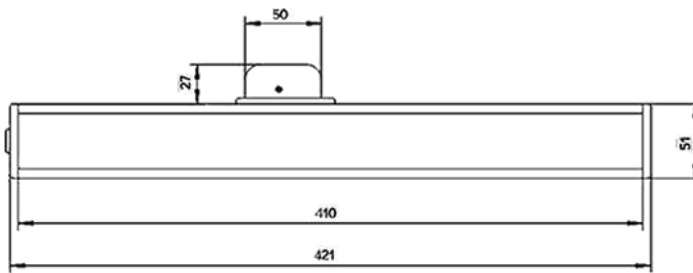

DATA PARAMETERS


Item	Stroke	Voltage	Current	Force	Speed	Protection	Length
CAT 50-400/300S	300	24V/DC	1.3A	400N	15mm/s	IP32	420mm
CAT 50-400/400S	400	24V/DC	1.3A	400N	15mm/s	IP32	470mm
CAT 50-400/500S	500	24V/DC	1.3A	400N	15mm/s	IP32	520mm
CAT 50-400/600S	600	24V/DC	1.3A	400N	15mm/s	IP32	570mm
CAT 50-400/700S	700	24V/DC	1.3A	400N	15mm/s	IP32	620mm
CAT 50-400/800S	800	24V/DC	1.3A	400N	15mm/s	IP32	670mm
CAT 50-400/900S	900	24V/DC	1.3A	400N	15mm/s	IP32	720mm
CAT 50-400/1000S	1000	24V/DC	1.3A	400N	15mm/s	IP32	770mm

* S: Standard, including 16045-DC001 and 16010.00.009 .



16010.00.009

SIZE

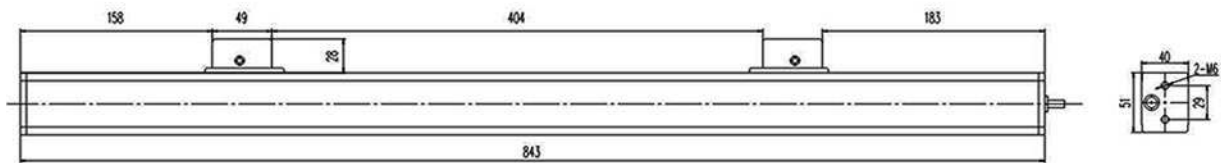

DATA PARAMETERS

Item	Stroke	Voltage	Current	Force	Speed	Protection	Length
CAT 50-400/300R	300	220/110V	1.3A	400N	15mm/s	IP32	470mm
CAT 50-400/400R	400	220/110V	1.3A	400N	15mm/s	IP32	520mm
CAT 50-400/500R	500	220/110V	1.3A	400N	15mm/s	IP32	570mm
CAT 50-400/600R	600	220/110V	1.3A	400N	15mm/s	IP32	620mm
CAT 50-400/700R	700	220/110V	1.3A	400N	15mm/s	IP32	670mm
CAT 50-400/800R	800	220/110V	1.3A	400N	15mm/s	IP32	720mm
CAT 50-400/900R	900	220/110V	1.3A	400N	15mm/s	IP32	770mm
CAT 50-400/1000R	1000	220/110V	1.3A	400N	15mm/s	IP32	820mm

* R: Built-in receiver, including 16010.00.009.




16045-DC001



16010.00.009

SIZE

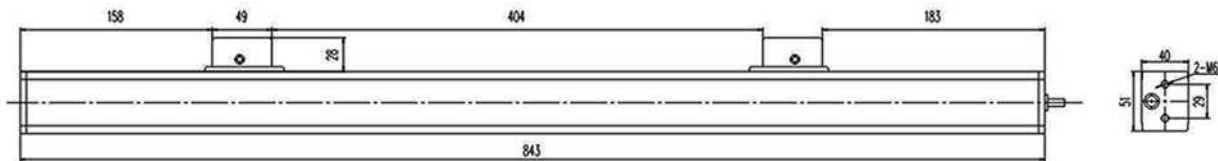

DATA PARAMETERS

Item	Stroke	Voltage	Current	Force	Speed	Protection	Length
CAT 50-D400/300	300	24/220V	1.3A	2x400N	15mm/s	IP32	830mm
CAT 50-D400/400	400	24/220V	1.3A	2x400N	15mm/s	IP32	930mm
CAT 50-D400/500	500	24/220V	1.3A	2x400N	15mm/s	IP32	1030mm
CAT 50-D400/600	600	24/220V	1.3A	2x400N	15mm/s	IP32	1130mm
CAT 50-D400/700	700	24/220V	1.3A	2x400N	15mm/s	IP32	1230mm

* S: Standard, including 16045-DC001 and 16010.00.009 ; R: Built-in receiver, including 16010.00.009.

CAT62

Door/Window Operator






16045-DC001



16010.00.009

SIZE

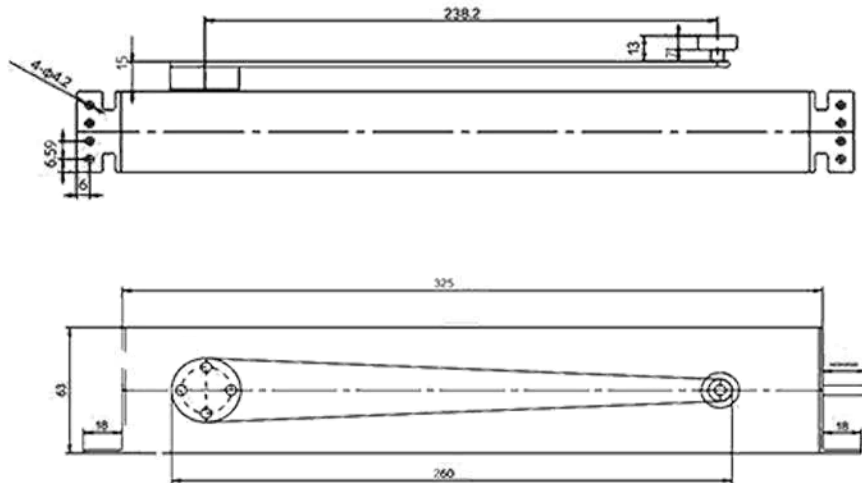

DATA PARAMETERS

Item	Max Angle	Voltage	Current	Force	Speed	Protection	Length
CAT 62S	90°	24V/DC	1.0A	200N	9s	IP44	360mm
CAT 62R	90°	220/110V	1.0A	200N	9s	IP44	360mm

* S: Standard, including 16045-DC001 and 16010.00.009 ; R: Built-in receiver, including 16010.00.009.



HUZHOU DP INDUSTRY CO.,LTD

TEL: +86 572 6267780

Email: dp@China-develop.com

Web: www.China-develop.com

