


Double-headed Tubular For Pergola

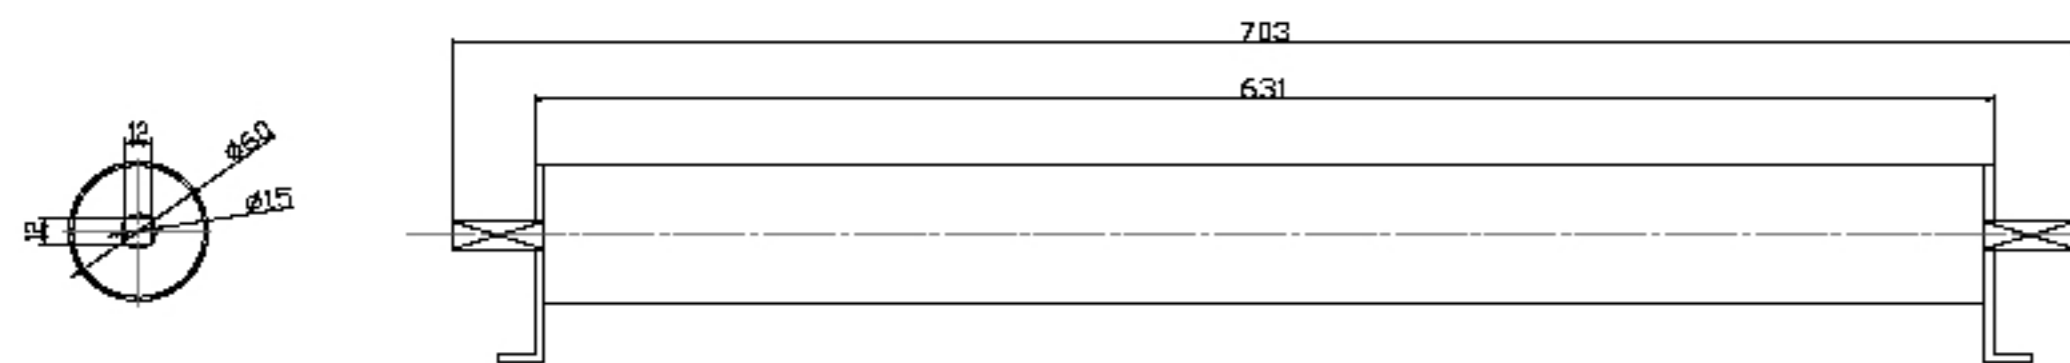

59S

59mm in diameter, 80Nm and 140Nm. Standard type.
Silent. Double Headed. CE approved.

Double Headed For Pergola

Technical Specifications

MODEL	RATED TORQUE	RATED POWER INPUT	TUBE DIAMETER	RATED CURRENT	RATED SPEED	PROTECTION INDEX	INSULATION CLASS
	(Nm)	(W)	(mm)	(A)	(rpm)	(IP)	
230V 50Hz	80N.m	320W	60mm	1.5A	15rpm	Ip44	Class H
	140N.m	300W	60mm	1.2A	3rpm	Ip44	Class H
120V 60Hz	80N.m	320W	60mm	3.0A	15rpm	Ip44	Class H
	140N.m	300W	60mm	2.5A	3rpm	Ip44	Class H

